



2212 Barnard Street

Siding Replacement:

Remove the existing wood siding, as well as the window trim from the left and right sides of the house, as well as the forward section of the backside

Furnish NEW House Wrap and window tape to the exposed decking, and around the windows.

Install NEW Exterior trim around the windows.

Install NEW 3.5" Wood lap siding to the walls.

Apply (1) Coat Oil based primer to all siding, trim, soffit and fascia around the house.

Apply (2) Coats Sherwin Williams Duration paint to all siding, trim, windows, soffit and fascia around the house.


Deck Replacement:


Demolish the existing deck, and haul away all the old wood.


Furnish a NEW outer Band using Pressure treated 2x10 Boards.

Construct a NEW Hand Rail system around the entire deck using pressure treated lumber.

Construct a NEW Set of stairs leading onto the deck using pressure treated lumber.

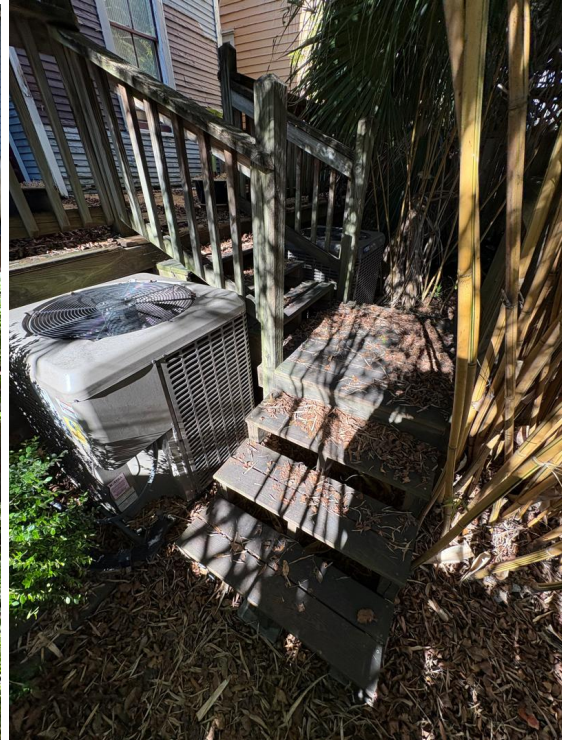

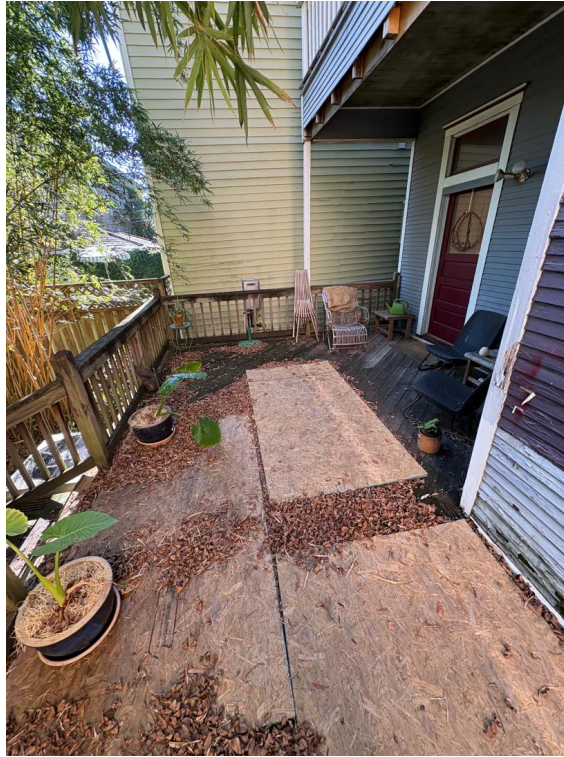

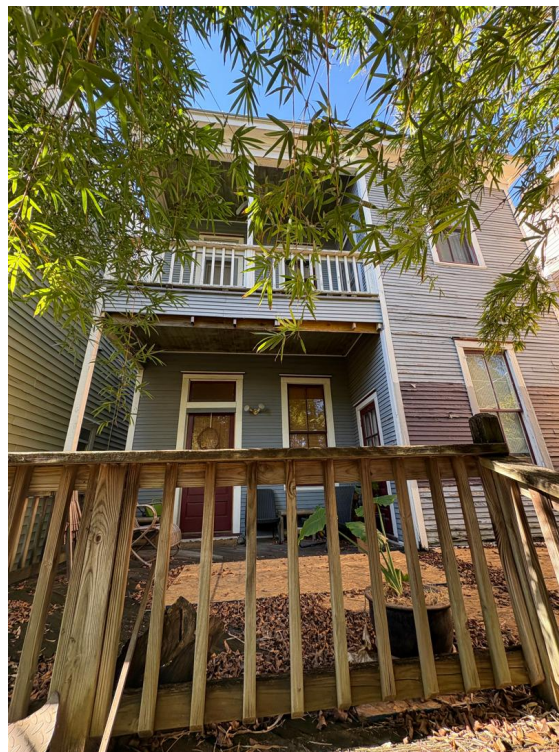

Manufacturers Specifications:

#119 Pine Siding 3.25" reveal - 16' & 12' lengths

5/4x6x12 KDAT (window trim)

House Wrap

Oil Base Primer

Sherwin Williams Exterior Duration Paint

Assorted PT boards (2x8, 2x10, 2x6, 2x4) - deck build

5/4x6x16 PT deck boards

2x2x36" PT Balusters

Physical samples of proposed materials:

#119 Pine Siding 3.25" reveal - 16' & 12' lengths




5/4x6x12 KDAT (window trim)



House Wrap



Oil Based Primer

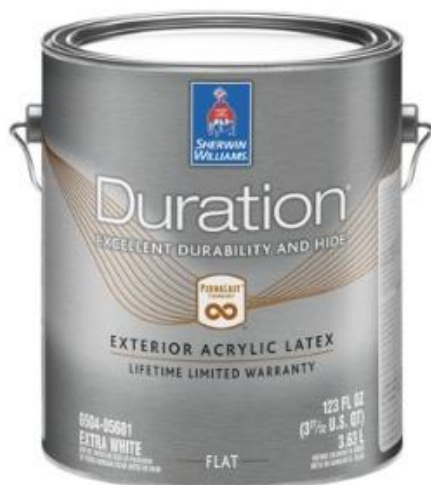

Sherwin Williams Exterior Duration Paint



5/4x6x16 PT deck boards



2x2x36" PT Balusters