

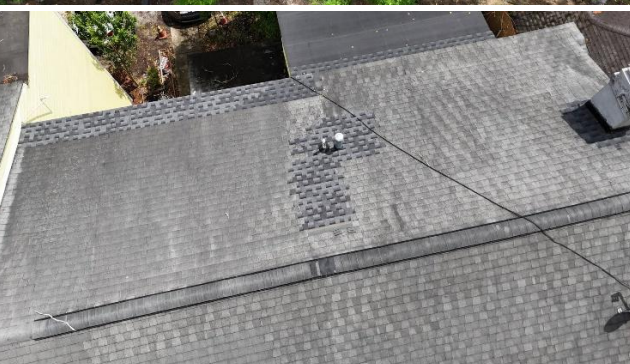




Project Description: Tear off the existing Shingles, Tear off existing felt paper, inspect & replace any rotten plywood. Install new felt paper, Install new ice & water. Install new shingles and all accessories (pipe boot, ridge vent, & chimney flashing.)



Description of each Special Exception requested: N/A

Color photographs of existing conditions:

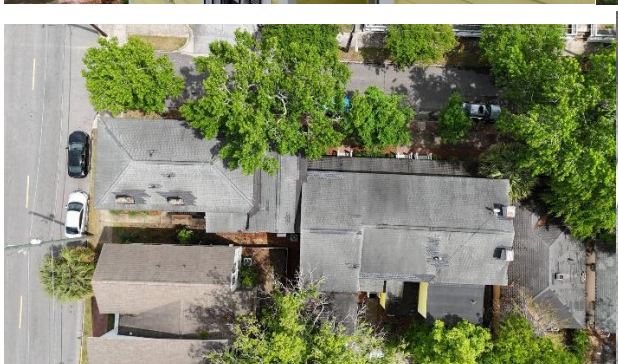

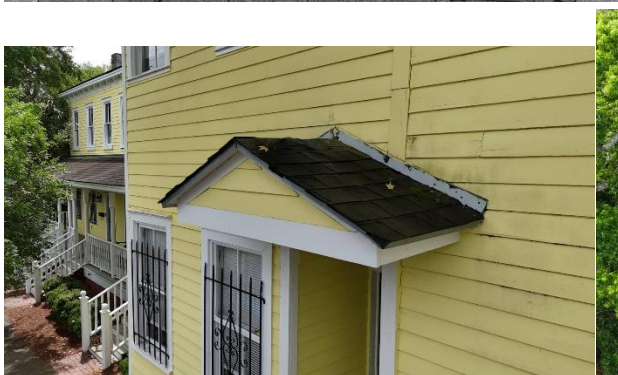

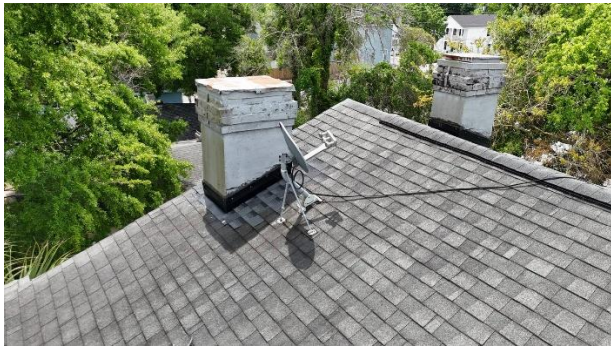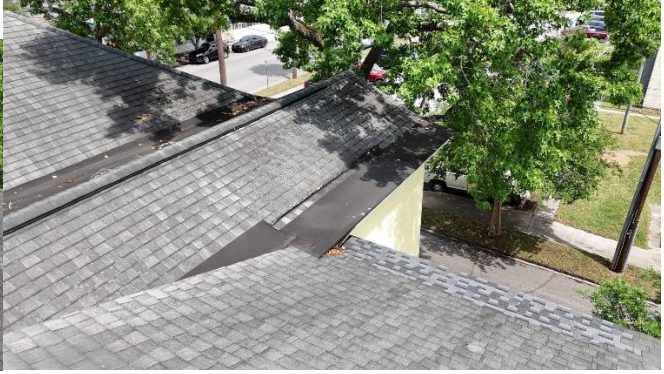

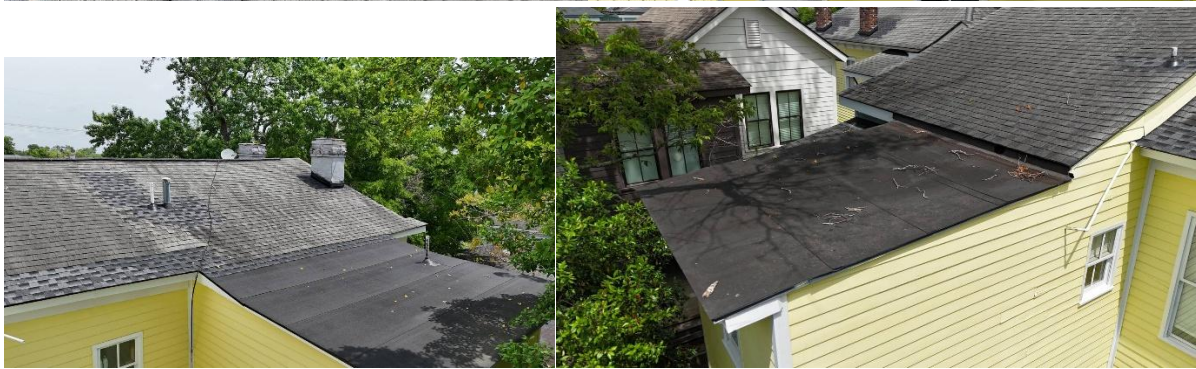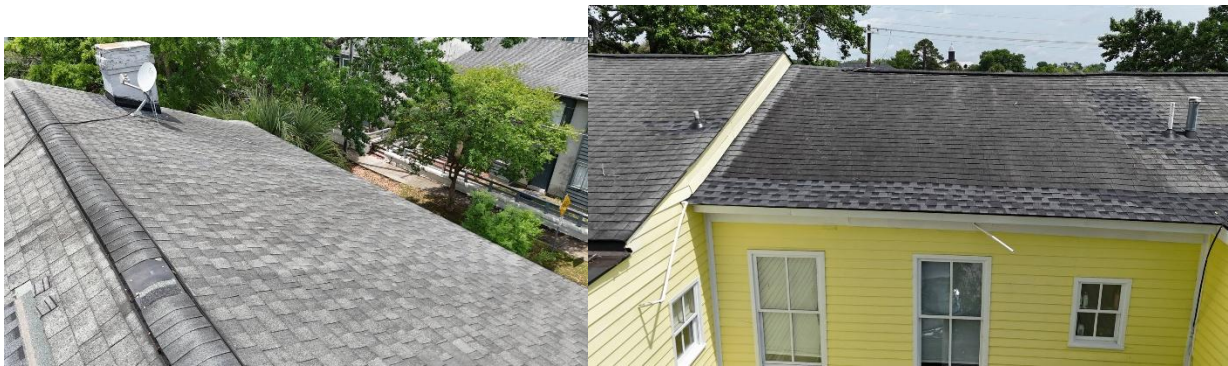



Demolition Plans: The only demolition will be removing old shingles, felt paper, bad plywood, and ice and water.

Roof Plan: Total roof area 5143 sqft

Total pitched area 4673 sqft

Total flat area 470 sqft

Total eaves 424ft 6in

Total valleys 4ft 2in

Total hips 84ft 10in

Total ridges 116ft 0in

Total rakes 219ft 4in

Total wall flashing 197ft 7in

Total step flashing 108ft 10in

Total transition 152ft 10in

Total parapet walls 0ft 0in

Hips + ridges 200ft 10in

Eaves + rakes 643ft 10in

Roof Pitches: 5 by 12 pitch

Equipment & screening: Dump trailer.

Exterior Elevations:

Adjacent buildings with dimensions: House structure 405/407/409

1,200 sqft

Dimensioned floor to floor heights: 2 story/ 20 feet

Stoop Heights: 8”

Height of parapet walls: No parapet walls.

Roof equipment with screening heights and locations: Dump trailer is the only equipment used.

Specifications for each product:



Pinnacle-Pristine-Shingles-Product-Data-2882263 (1).pdf

Physical Material Samples: Atlas Pinnacle Pristine - Black Shadow



Historic images, plans, etc. for a restoration or reconstruction:

N/A