



CITY OF SAVANNAH

HISTORIC PRESERVATION COMMISSION

REQUEST FOR CERTIFICATE OF APPROPRIATENESS

Petitioner: Custom Building Developments, Deidrick Cody

MPC File No.: 26-002128-COA

Address: 937 West 38th Street

PIN: 20073 02007

Zoning: TR-3

Staff Reviewer: Caitlin Chamberlain


Date: September 23, 2026


NATURE OF REQUEST:

The applicant is requesting approval to construct a rear addition to the property located at 937 West 38th Street.

CONTEXT/SURROUNDING AREA:

937 West 38th Street was built in 1925 and is a contributing resource within the National Register Cuyler-Brownville Historic District and the local Cuyler-Brownville Historic District. It is a one-story bungalow type house surrounded by contributing and non-contributing houses in similar styles. The houses are situated very closely together. Note that the 1950 Sanborn Map shows the house as 935 instead of 937 as it is seen today.



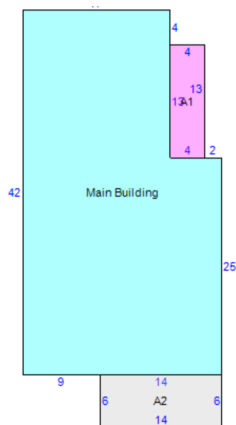

Item	Area
Main Building	864
A1 - 904:904-Slab Porch (SF) with Roof	52
A2 - 904:904-Slab Porch (SF) with Roof	84

PROJECT HISTORY:

This was first presented to the HPC at the May 27, 2026, meeting where the decision was as follows:

The Savannah Historic Preservation Commission does hereby continue the request to install a rear addition to the property located at 937 West 38TH Street to the June 24, 2026, Historic Preservation Commission Meeting to allow the applicant time to address the following:

1. *Clarify whether the rear elevation is proposed for demolition or will be incorporated into the addition.*

The applicant stated that the rear elevation will be incorporated into the addition.

2. *Provide clear photographs of the rear of the house showing the rear yard as well.*

These have now been provided.

3. *Provide elevation drawings that note materials.*

This has been included in the updated submittal.

4. *Consider installing a different sized siding to help differentiate the old from the new construction.*

The discussions held after the May meeting included going over all the conditions of the continuance. The applicant was not as amenable to the different sized siding but another option came up, which was a piece of vertical trim board to show the addition area. Staff finds this could be acceptable but should be reflected on the final set of drawings. The applicant is now proposing to use Hardie siding instead of wood, which will also help differentiate the old from the new.

5. *Lower the roofline so that the addition is subordinate to the historic house.*

The roofline has been slightly lowered and now meets the standards.

6. *Clarify whether the side elevation is visible from West 38th Street and if so, confirm on the drawings that the windows meet the 30% minimum for fenestration.*

Photos provided show how close the houses are together on this street, but the side elevations are visible. There is sufficient fenestration on either side elevation where the 30% appears to already be met and the windows on the addition will align with this transparency requirement.

7. Align windows and door on the rear elevation for visual compatibility compliance.

The windows have been removed with only a door centered on the rear elevation of the addition.

8. Select an approved window type, as vinyl is prohibited.

The applicant is now proposing Andersen 200 series, which are appropriate for the addition.

9. Provide material and product specifications for the door.

The door is steel. Product specs were included.

10. Coordinate the foundation of the addition similar to the existing building.

The applicant explored this option but requests to keep the foundation height at the same level as was originally proposed due to connecting the interior floor of the existing house to the addition. Since they have lowered the roofline of the addition, it will now read as subordinate and not part of the original structure.

FINDINGS:

The following standards from the Article 5 - Base Zoning Districts apply:

***(TR) Traditional Residential District Development Standards.** Development in any TR-district shall meet the development standards as set forth below.*

TR-3 Development Standards for Permitted Uses.

TR-3, Building Coverage (max).

All housing types & uses (except Two-Family, Three & Four-Family): 50%

The applicant provided information stating there was 25% lot coverage and the inclusion of the addition would maintain the 50% or less lot coverage.

TR-3, Building Setbacks (ft), Single-family Detached.

Side (interior) yard: 3 (min)

Side (street) yard: 10 (max)

Rear yard: 20 (min)

The standards are met.

The following standards from the Sec 7.10 - Cuyler-Brownville Historic District Ordinance apply:

***Secretary of the Interior's Standards and Guidelines for Rehabilitation.** Material changes to contributing resources and resources that are eligible for listing as contributing shall be evaluated by use of the current edition of the Secretary of the Interior's Standards and Guidelines for Rehabilitation as published by the U.S. Department of the Interior. In considering proposals for alterations to contributing resources, the documented original design of the resource may be considered.*

Secretary of the Interior's Standards 2– Historic Character. *The historic character of a property shall be retained and preserved. The removal of historic materials or alteration of features and spaces that characterize a property shall be avoided.*

Secretary of the Interior's Standards 3– Physical Record. *Each property shall be recognized as a physical record of its time, place, and use. Changes that create a false sense of historical development, such as adding conjectural features or architectural elements from other buildings, shall not be undertaken.*

Secretary of the Interior's Standards 5– Distinctive Features. *Distinctive features, finishes, and construction techniques or examples of craftsmanship that characterize a property shall be preserved.*

Secretary of the Interior's Standards 9– New Additions to not Damage. *New additions, exterior alterations, or related new construction shall not destroy historic materials that characterize the property. The new work shall be differentiated from the old and shall be compatible with the massing, size, scale and architectural features to protect the historic integrity of the property and its environment.*

Secretary of the Interior's Standards 10– New Additions Reversible. *New additions and adjacent or related new construction shall be undertaken in such a manner that if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired.*

Regarding the above standards, with the initial submittal there were design concerns including tying the roofline of the addition into the roofline of the historic house. The revised design now shows a stepped down roofline to allow the addition to be subordinate to the historic house and not cause confusion that the addition is part of the original house. Additions inevitably cause some degree of damage, but it is on the rear wall and less visible from the street view. In theory, the addition could be removed in the future and the original rear wall restored.

Staff has concerns with a proposed new side door installation on the side elevation where there is not currently a door opening. More information is requested including photos and details on whether the egress stairs will be going into the side yard setback.

The following standards from the Sec 7.10 - Cuyler-Brownville Historic District Ordinance apply:

Visual Compatibility Criteria. *To maintain the special character of the Victorian Historic District as identified in the architectural survey and visual analysis, new construction and any material change in appearance shall be consistent with the standards, criteria and guidelines developed for the district. The applicable criteria below shall be used to assess new construction and material changes. These criteria shall not be the basis for appeal to any board, commission or administrator described in this Ordinance, or to the Mayor and Aldermen.*

Height. *The overall height and the height of individual components of the proposed building or structure shall be visually compatible with contributing buildings and structures to which it is visually related.*

Width. *The proportion of the overall width and the width of individual components of the proposed building or structure shall be visually compatible to the contributing buildings and structures to which it is visually related.*

Scale. *The overall scale and the scale of individual components of the proposed building or structure shall be visually compatible to the contributing buildings and structures to which it is visually related.*

The height, width, and scale of the proposed addition is compatible in light of the revisions since the last meeting. The updated elevations also have provided clarity that the addition will meet the above standards.

Setbacks. *The setbacks of the proposed building or structure shall be visually compatible with setbacks of contributing buildings and structures to which it is visually related.*

The setbacks follow the house and thus are visually compatible. A complete site plan that shows the whole lot will confirm this for the rear.

Openings. *The rhythm and solid-to-void ratio of the proposed building or structure shall be visually compatible with contributing buildings and structures to which it is visually related.*

The standard is now met.

Materials. *The relationship of materials and textures of the proposed building or structure shall be visually compatible with the contributing buildings and structures to which it is visually related.*

The proposed materials are visually compatible and include:

- Smooth Hardie siding
- Andersen 200 series windows (lite pattern info is needed)
- Architectural asphalt roof shingles

Roof Shapes. *The roof shape of the proposed building or structure shall be visually compatible with contributing buildings and structures to which it is visually related.*

The gable roof shape is appropriate and has been stepped down from the original design.

The following standards from the Sec 7.10 - Cuyler-Brownville Historic District Ordinance apply:

Cuyler-Brownville Historic District Design Standards.

New Construction, Additions, and Alterations. The intent of these standards is to ensure appropriate new construction, additions, and alterations within the Cuyler-Brownville Historic District. They are not intended to promote copies of the architectural designs of the past, but to encourage contemporary designs that protect and complement existing contributing resources. They are further intended to protect the historic integrity of the contributing resource.

The following design standards shall apply to new construction, additions, alterations to contributing and non-contributing buildings and structures, and site alterations, unless otherwise specified. Though certain building materials are prescribed below, the Historic Preservation Commission may approve alternative materials that are not listed as prohibited

upon a showing by the applicant that the material or product is visually compatible with historic building materials and has performed satisfactorily in the local climate.

Height and Mass. *The intent of these standards is to ensure that the height and mass are in context with contributing buildings in the same or adjacent block faces.*

The height and mass shall be subdivided both horizontally and vertically to convey human scale and visual interest that reflects the traditional size of buildings.

The height of the addition is shorter than the height of the historic house and the massing does not exceed that of the historic house.

Floor-to-Floor Heights.

In single-family detached, single-family attached, two-family attached, three-family/four-family, and townhouse dwellings, the exterior expression of the height of the first story shall not be less than 11 feet and the height of the upper stories shall not be less than nine (9) feet.

The height is based on the house that exists and it is acceptable for an addition to work within existing conditions.

Foundation, New construction, alterations to non-contributing resources and additions.

Foundation Materials, New construction, alterations to non-contributing resources and additions.

Foundations shall be constructed of brick, stone, or true stucco over concrete block piers.

The foundation appears to be brick piers with lattice infill, but this should be confirmed on the drawings elevation drawings.

Foundation Configuration, New construction, alterations to non-contributing resources and additions.

In single-family detached, single-family attached, two-family attached, three-family/four-family, and townhouse dwellings, foundations shall be the average height of foundations on contributing buildings on the block face, or if no contributing buildings exist, shall have a minimum finished floor height of 30 inches above grade.

Beneath a wood frame building, the foundation shall be recessed and not project forward of the building plane.

The standard is met.

Exterior walls, New construction, alterations to non-contributing resources, and additions.

Permitted materials, Exterior walls, New construction, alterations to non-contributing resources, and additions. *Brick, stone, wood, true stucco, painted concrete block, precast concrete panels, metal shingles, and wood or fiber cement siding.*

The siding is proposed to be wood lap Hardie fiber cement siding. The difference in materials from the wood siding on the house will help differentiate the addition and the historic house.

Windows, New construction, alterations to non-contributing resources, and additions.

Materials, Windows, New construction, alterations to non-contributing resources, and additions.

Window casings and sashes shall be made of PVC, metal, wood or clad wood material.

Window glass shall be transparent with no dark tints or reflective effects (except for stained glass windows). This provision does not preclude the use of Low Emissivity or laminated glass.

Solid vinyl windows are prohibited.

Andersen 200 series windows are proposed, which are acceptable for new construction. The glass will be clear.

Configuration, Windows, New construction, alterations to non-contributing resources, and additions.

Windows shall be taller than they are wide, except for accent windows, which may be round or other shapes.

The standard is met.

Windows shall be single-hung, double-hung, triple hung, awning, or casement, except for accent windows which may also be fixed or hopper.

Proposed windows are double hung. The standard is met.

Simulated divided light windows shall be permitted provided that the muntin is 7/8 inches or less, the muntin profile shall simulate traditional putty glazing, the lower sash rail shall be wider than the meeting and top rails, and there shall be a spacer bar in between double panes of glass. Between-the-glass, snap-in or applied muntins shall not be permitted.

This information was not provided, but if the lite pattern is 1-over-1 then it would not be necessary to provide this information. Confirmation of the lite pattern is requested.

Framing members shall be covered with appropriate trim; trim shall feature a header, surrounds, and pronounced sill where appropriate.

The standard is met.

Window sashes shall be inset a minimum of three (3) inches from the façade of a building, except for wood frame buildings.

This is a wood frame building.

All residential facades visible from a street shall incorporate transparent features (windows and doors) over a minimum of 30% of the ground floor façade.

The house already meets the 30%. The side windows of the addition will add to this and the standard is met.

Doors/Entrances, New construction, alterations to non-contributing resources and additions.

Doors/Entrances, Materials, New construction, alterations to non-contributing resources and additions.

Doors shall be made of glass, wood, clad wood or steel (without wood grain simulation).

The rear door on the addition will be steel.

Doors shall not have a decorative diamond or half-moon inset.

The standard is met.

Roof, New construction, alterations to non-contributing resources and additions.

Roof, Materials, New construction, alterations to non-contributing resources and additions.

Roof coverings shall be standing seam metal, v-crimp, slate or equivalent synthetic, or architectural asphalt or similar shingles.

Architectural asphalt shingles are proposed.

Roof, Configuration, New construction, alterations to non-contributing resources and additions.

Gable and hip roof shall be symmetrically pitched between 4:12 and 10:12.

The roof is proposed to be 6:12.

Eaves shall extend no less than 12 inches beyond supporting walls.

The standard is met.

Gable end rakes shall overhang at least eight (8) inches.

The standard is met.

Mechanical Equipment and Refuse. *The intent of these standards is to ensure that mechanical equipment and refuse is appropriately sited to provide the least negative visual impact. In addition to the requirements set forth in Sec. 9.5, Screening and Buffers, mechanical equipment and refuse shall comply with the following:*

Electrical vaults, meter boxes, communications devices, and satellite dishes shall be located on the secondary or rear façades and shall be minimally visible.

The electrical meter box is on the rear of the house and when the addition is installed, Georgia Power makes the determination where it is placed, but it seems the most likely place would still be on the rear elevation.

Additions. *In addition to compliance with the Visual Compatibility Criteria and the Victorian Historic District Design Standards, additions to contributing resources shall*

Staff Report - Certificate of Appropriateness
MPC File No. 26-002128-COA
937 W 38th St.
September 23, 2026

also comply with the Secretary of the Interior's Standards and Guidelines for Rehabilitation and the following standards:

Additions shall be subordinate in mass and height to the resource.

Additions shall not obscure any character-defining features.

Additions shall not be on the primary or front façade of the resource.

The addition, as revised from the last meeting, is subordinate in mass and height to the historic building. The rear elevation has the least visible amount of character defining features and is the ideal location for its placement.

STAFF RECOMMENDATION:

Continue the request to install a rear addition to the property located at 937 West 38TH Street to the October 28, 2026, Historic Preservation Commission Meeting to allow the applicant time to address the following:

- 1. Provide more information about the proposed door on the side elevation including clear photographs of the existing conditions, information about the egress stairs and materials, and whether this would encroach into the side yard setback.**
- 2. Confirm whether the new windows will be 1-over-1 as shown on the elevations.**

MW: CC:

Note: This recommendation could change subject to new information provided at the Historic Preservation Commission meetings. Final decisions will be made by the Historic Preservation Commission at the public hearing based on information provided at the meeting, as well as information submitted for the staff recommendation.