



502-504 East Waldburg St

Scope of work:

Column Replacement

We propose to provide the labor and material to replace the (2) second story columns on the house.

Prop up the roof of the porch using 2x4 framing.

Remove the (2) existing columns and handrails from the porch (handrails will be set aside for reinstallation).

Furnish, install and secure the (2) NEW wood columns to the porch and roof.

Secure the existing hand rail system to the new columns.

Apply (1) Coat of Primer to the new columns.

Apply (2) coats Sherwin Williams Super paint to the NEW Columns, as well as the existing hand rail system.

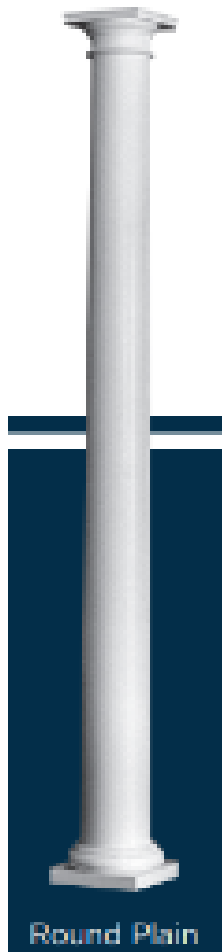






Manufacturers Specifications:

Standard 10"x8' Plain Round Tapered FJ Pine Column

Physical samples of proposed materials:

Standard 10"x8' Plain Round Tapered FJ Pine Column