
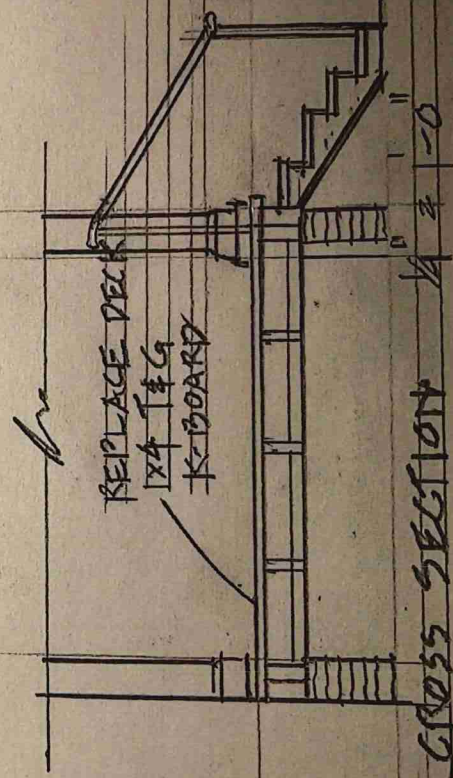


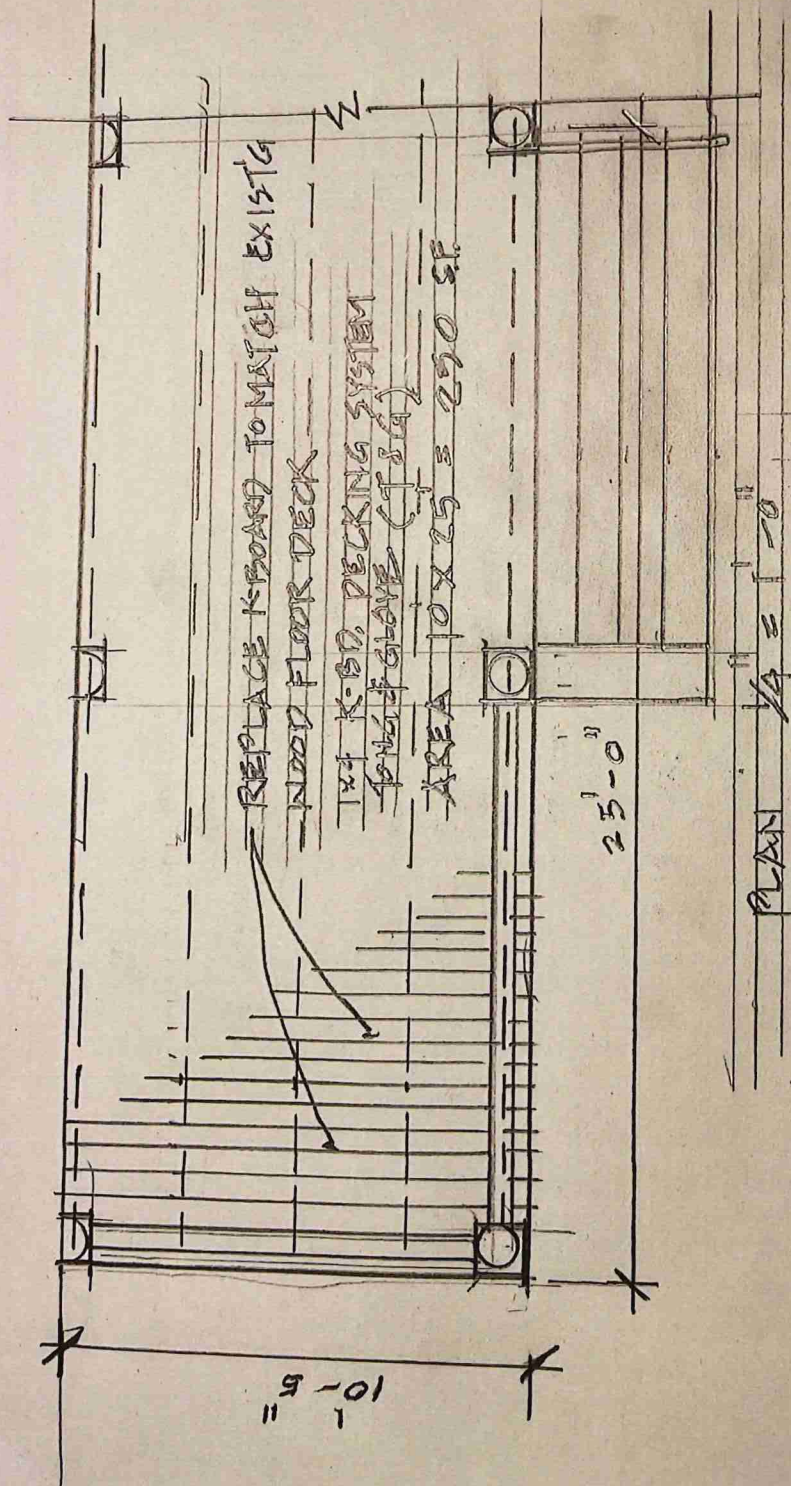

1

SCOPE OF WORK -

409 E. HALL ST.

FRONT PORCH DECK REPLACEMENT

DECK BOARDS ONLY -

IN KIND REPLACEMENT (SAME TYPE)

PAINT TO MATCH EXISTING COLOR

DARK GREEN

HVAT TONGUE & GROOVE PORCH


FLOORING

RUSSELL FINLAND, CONTRACTOR

912 655 7555



2

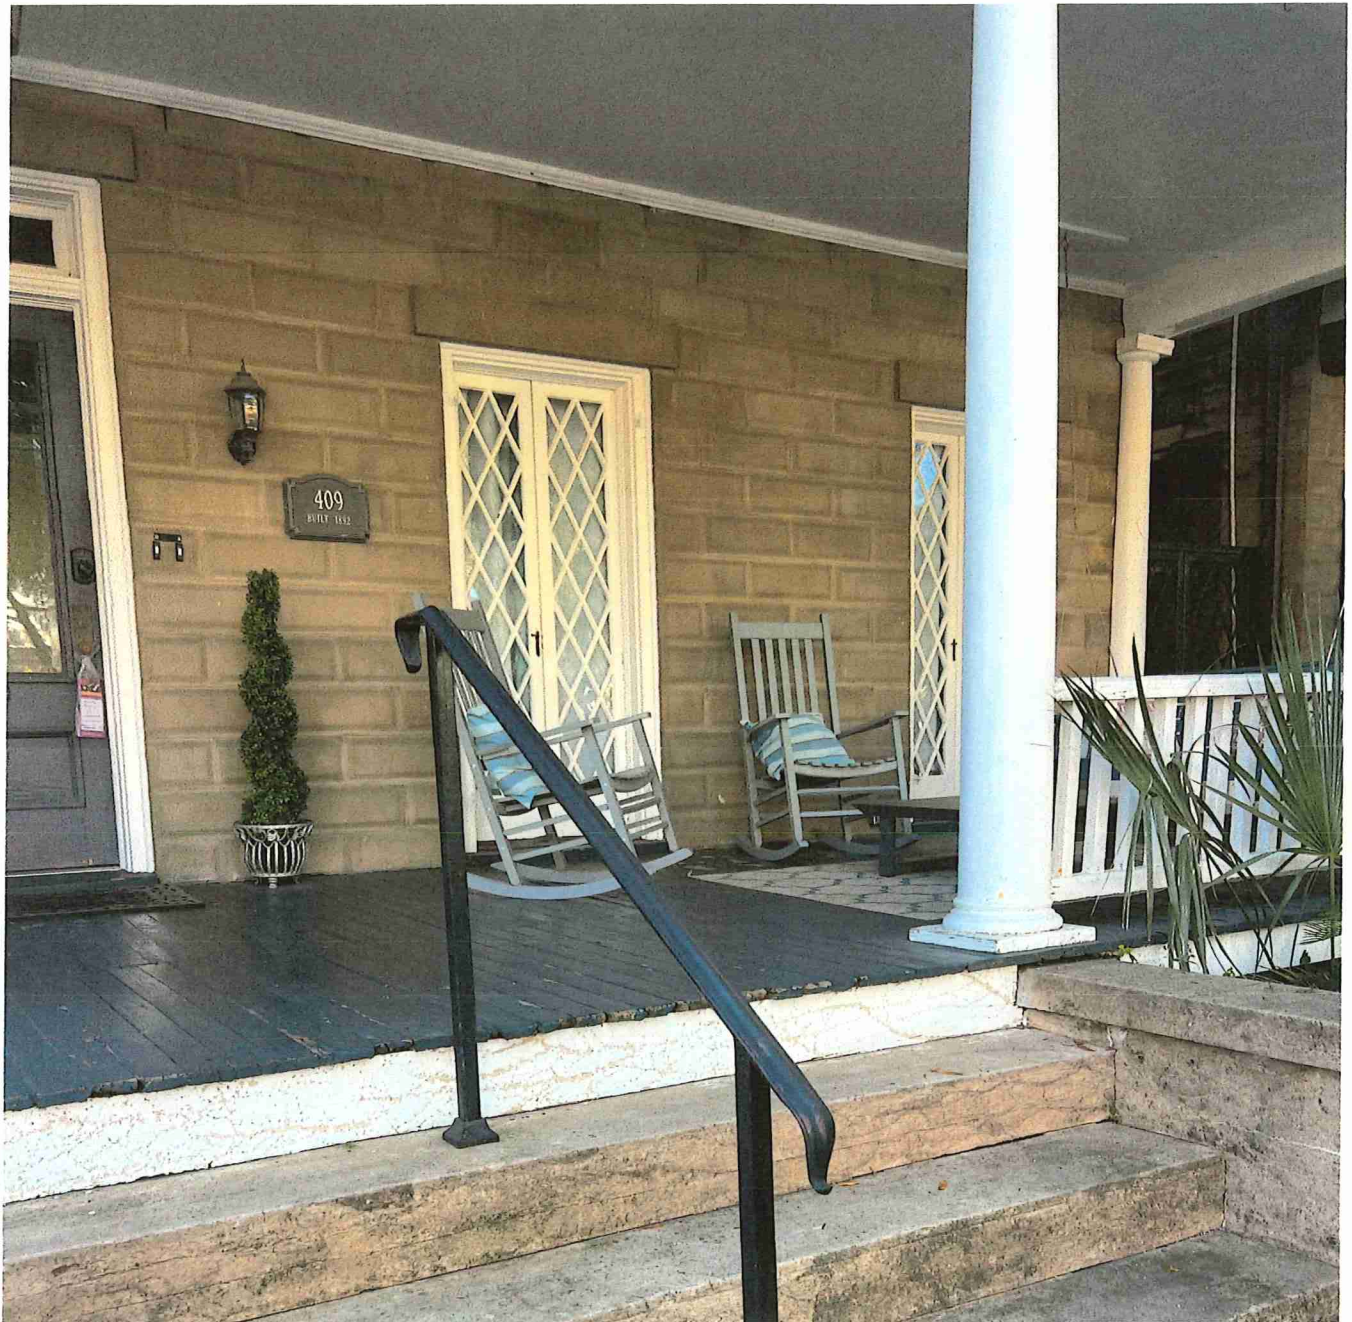

IMG_6572.jpeg




Download




Full screen



Print



Hide email

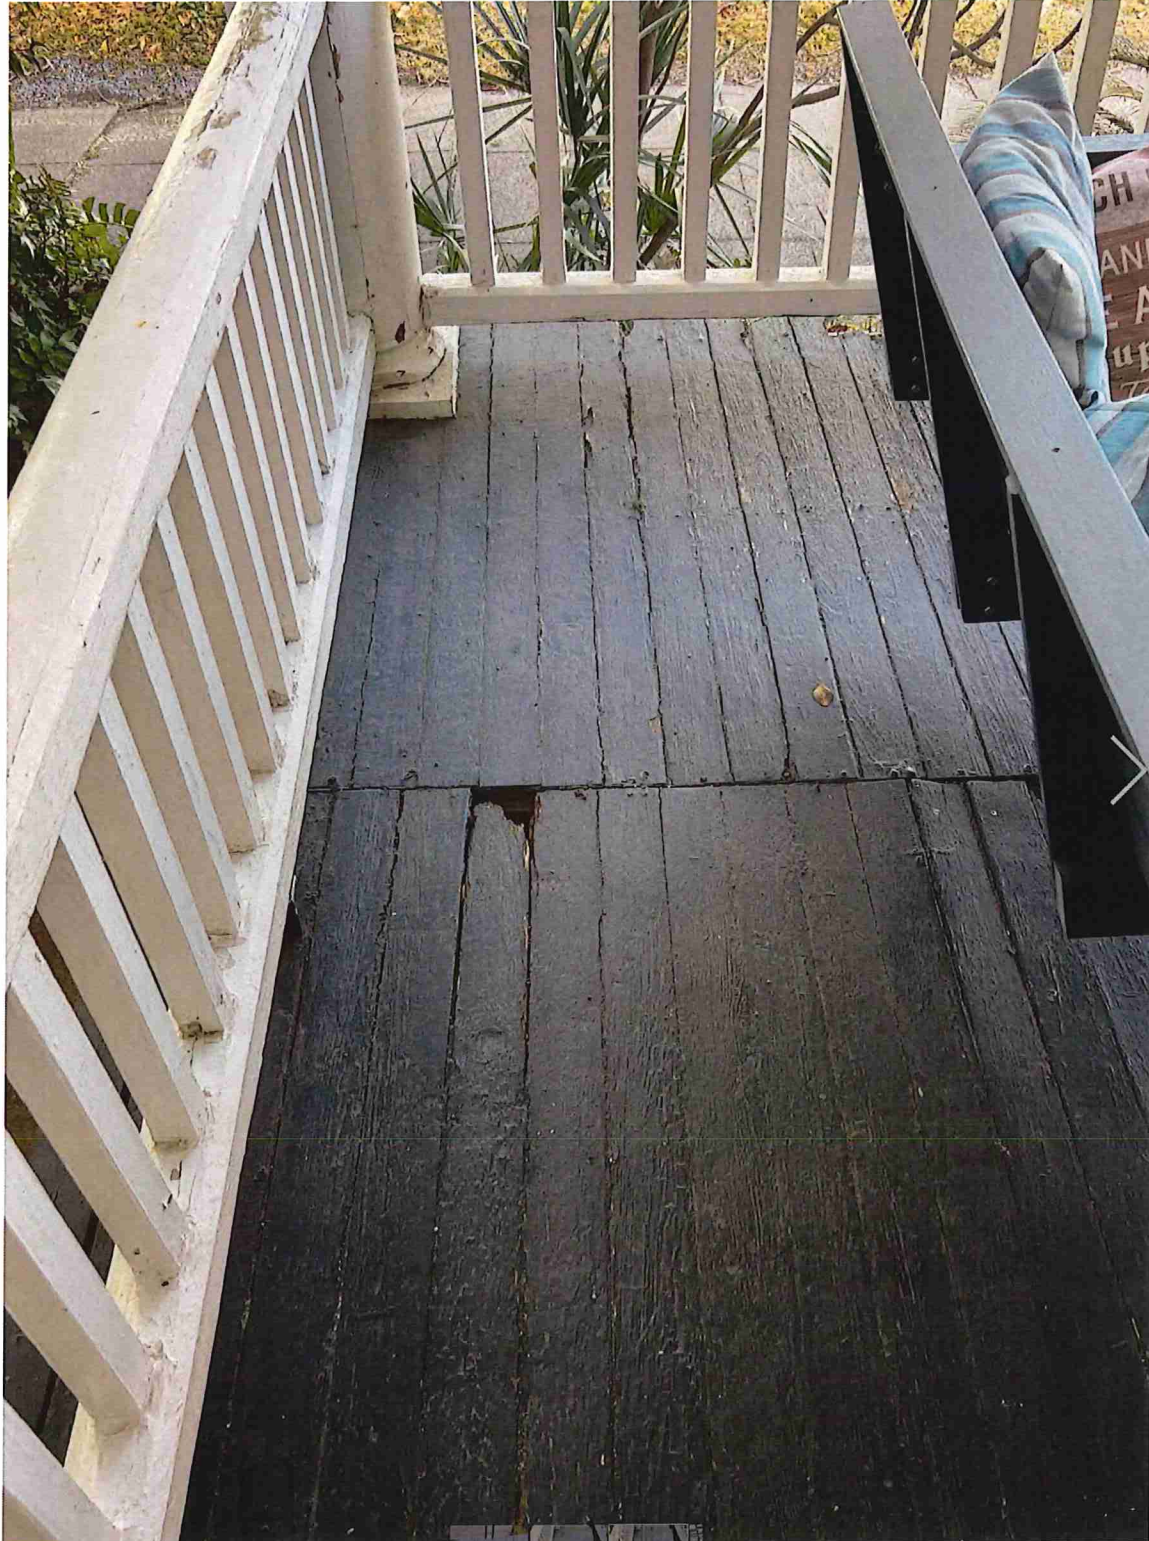

Porch f

RF



IMG_6574.jpeg



Download



Full screen



Print

2




Hide email



Porch

RF

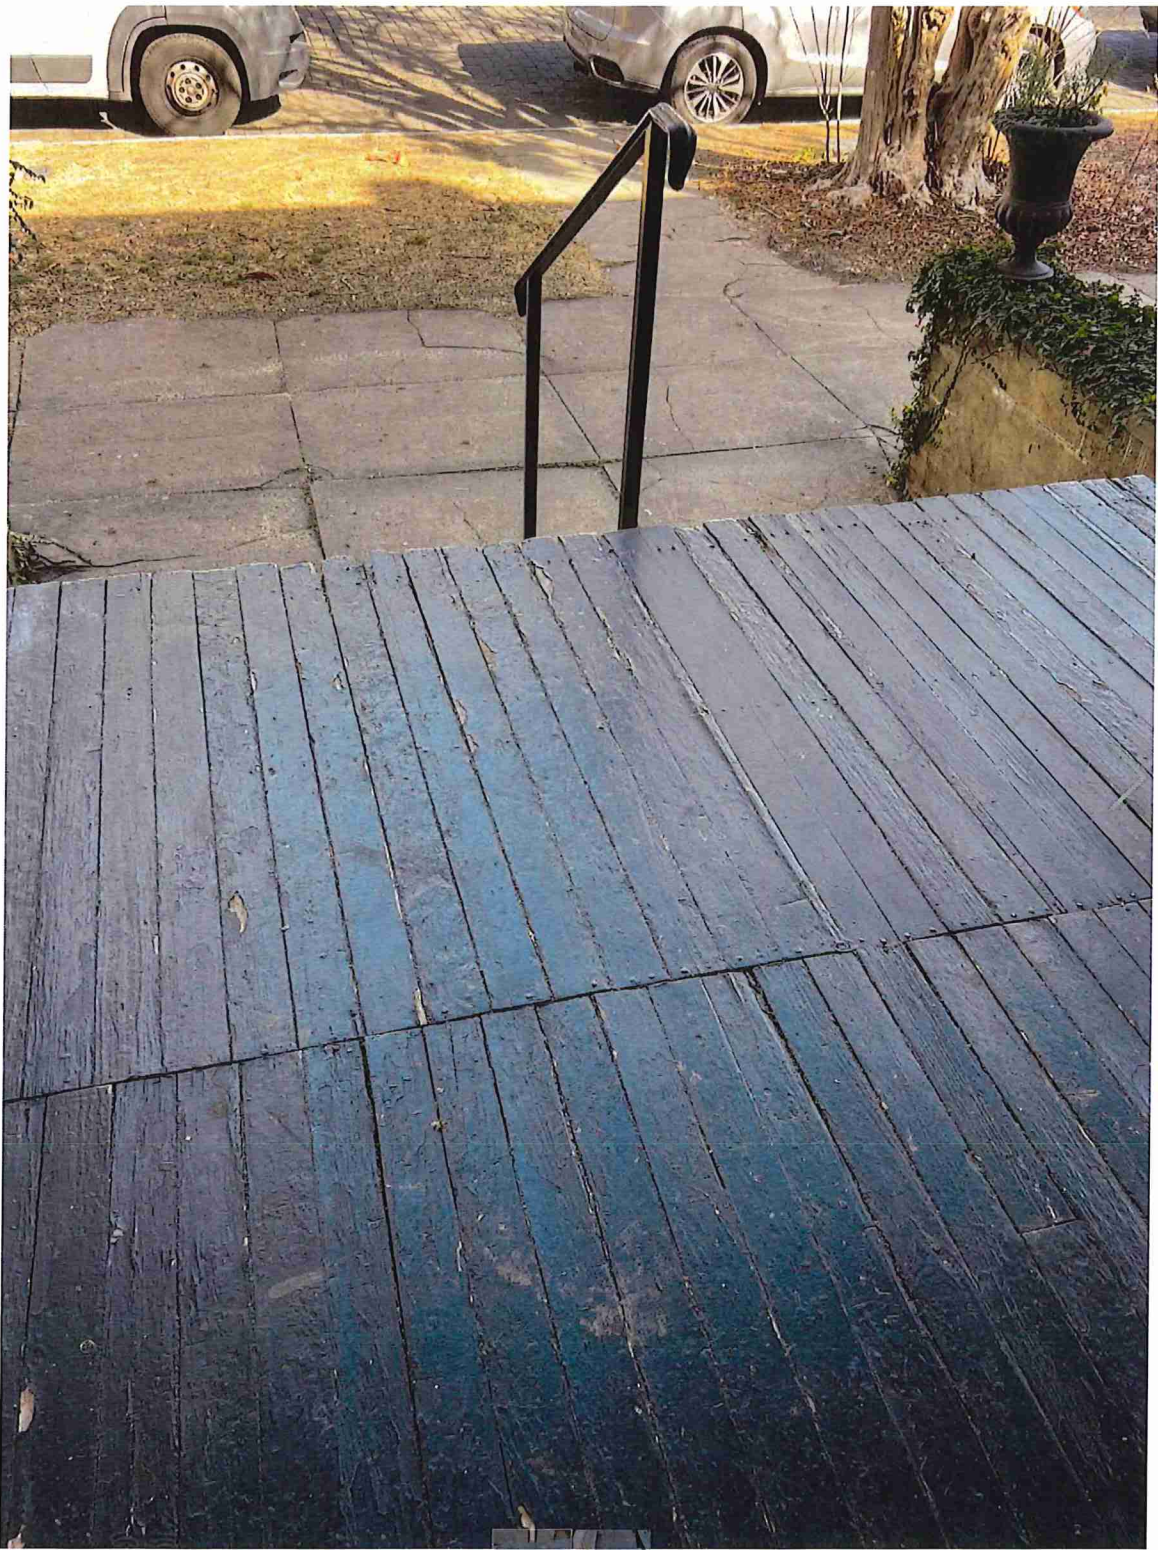

IMG_6571.jpeg



Download



Full screen



Print

2





Hide email



Porch

RF

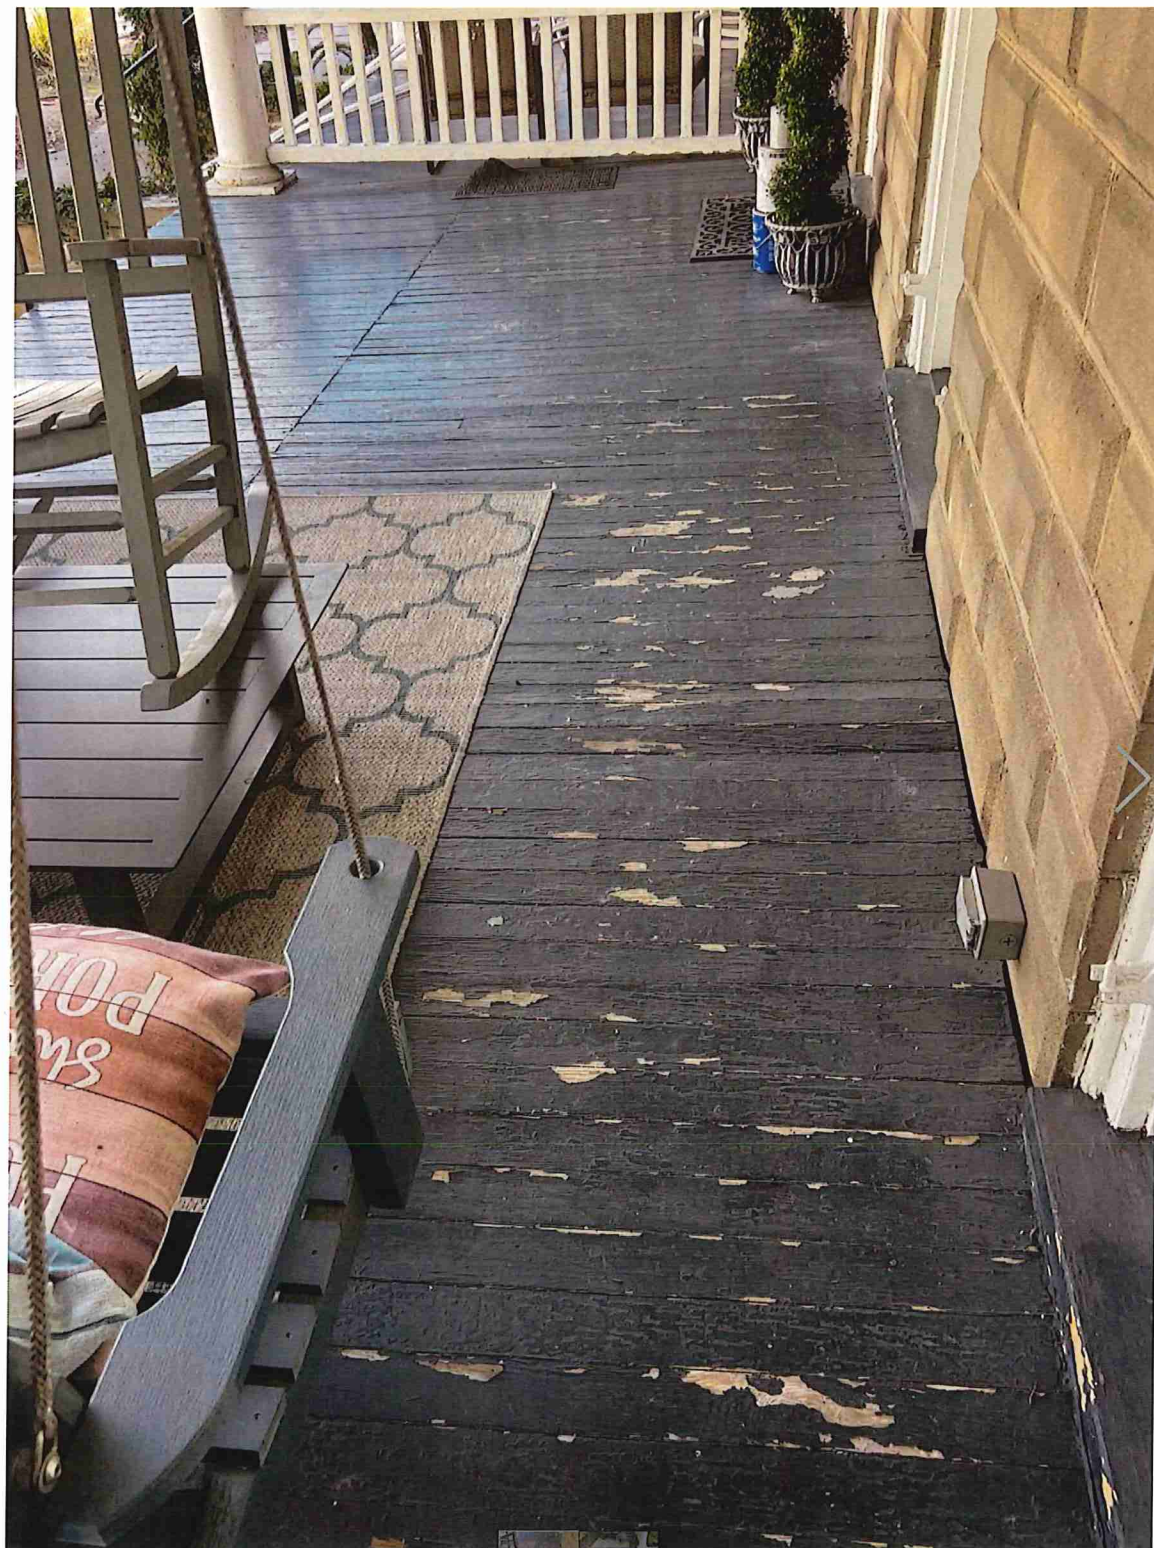


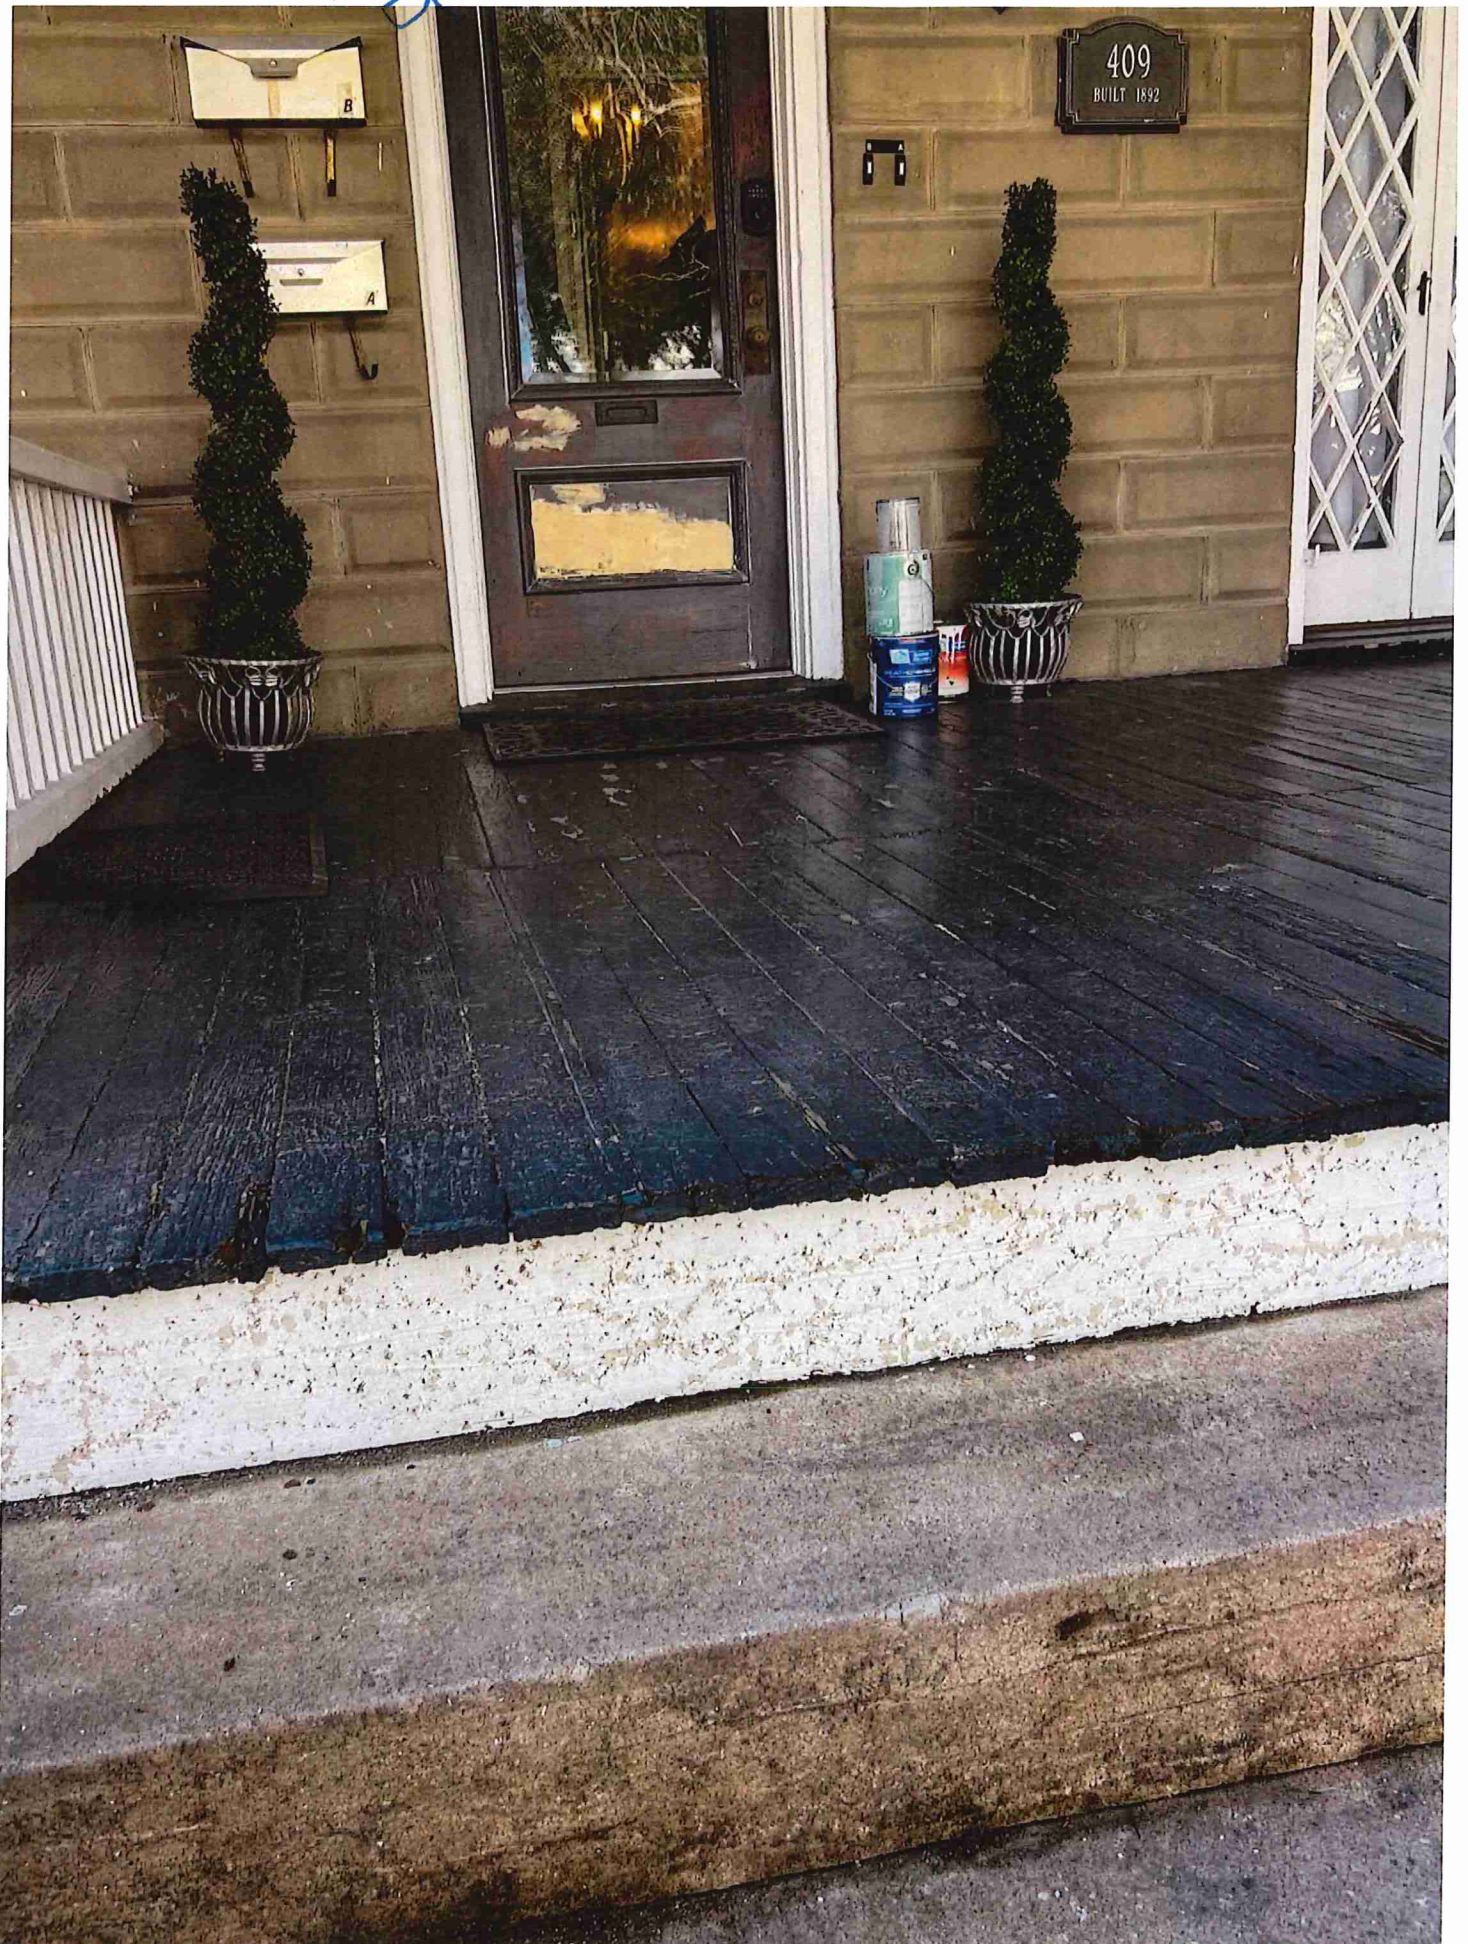


From: Russell Finland rfinland@hotmail.com
Subject: Pix porch floor
Date: January 7, 2026 at 8:04 AM
To: Russell Finland rfinland@hotmail.com

2

RF

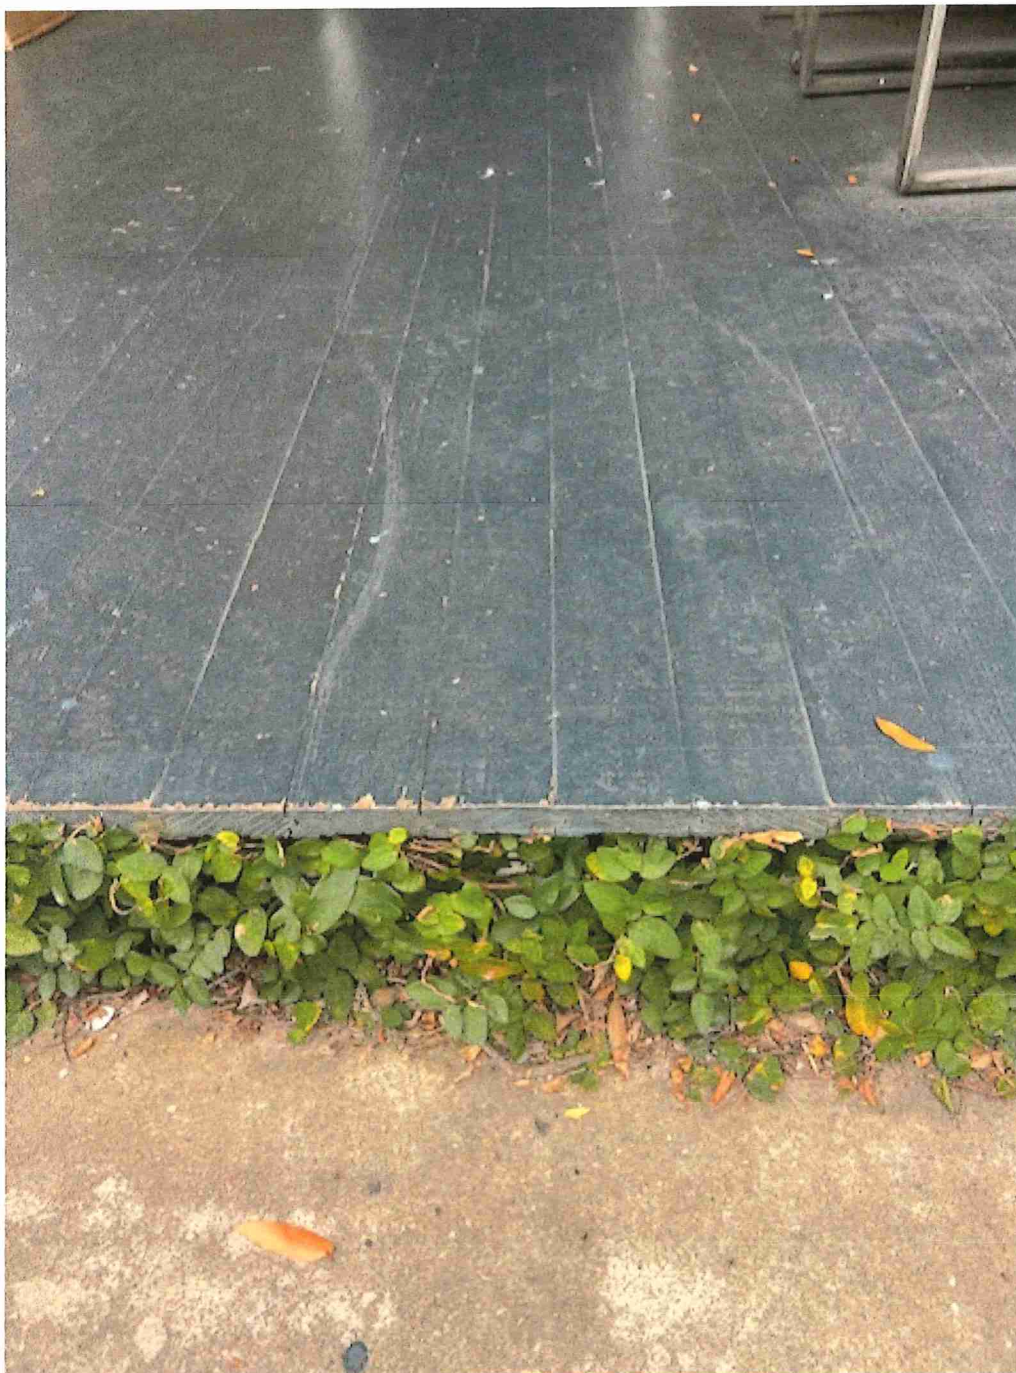

2

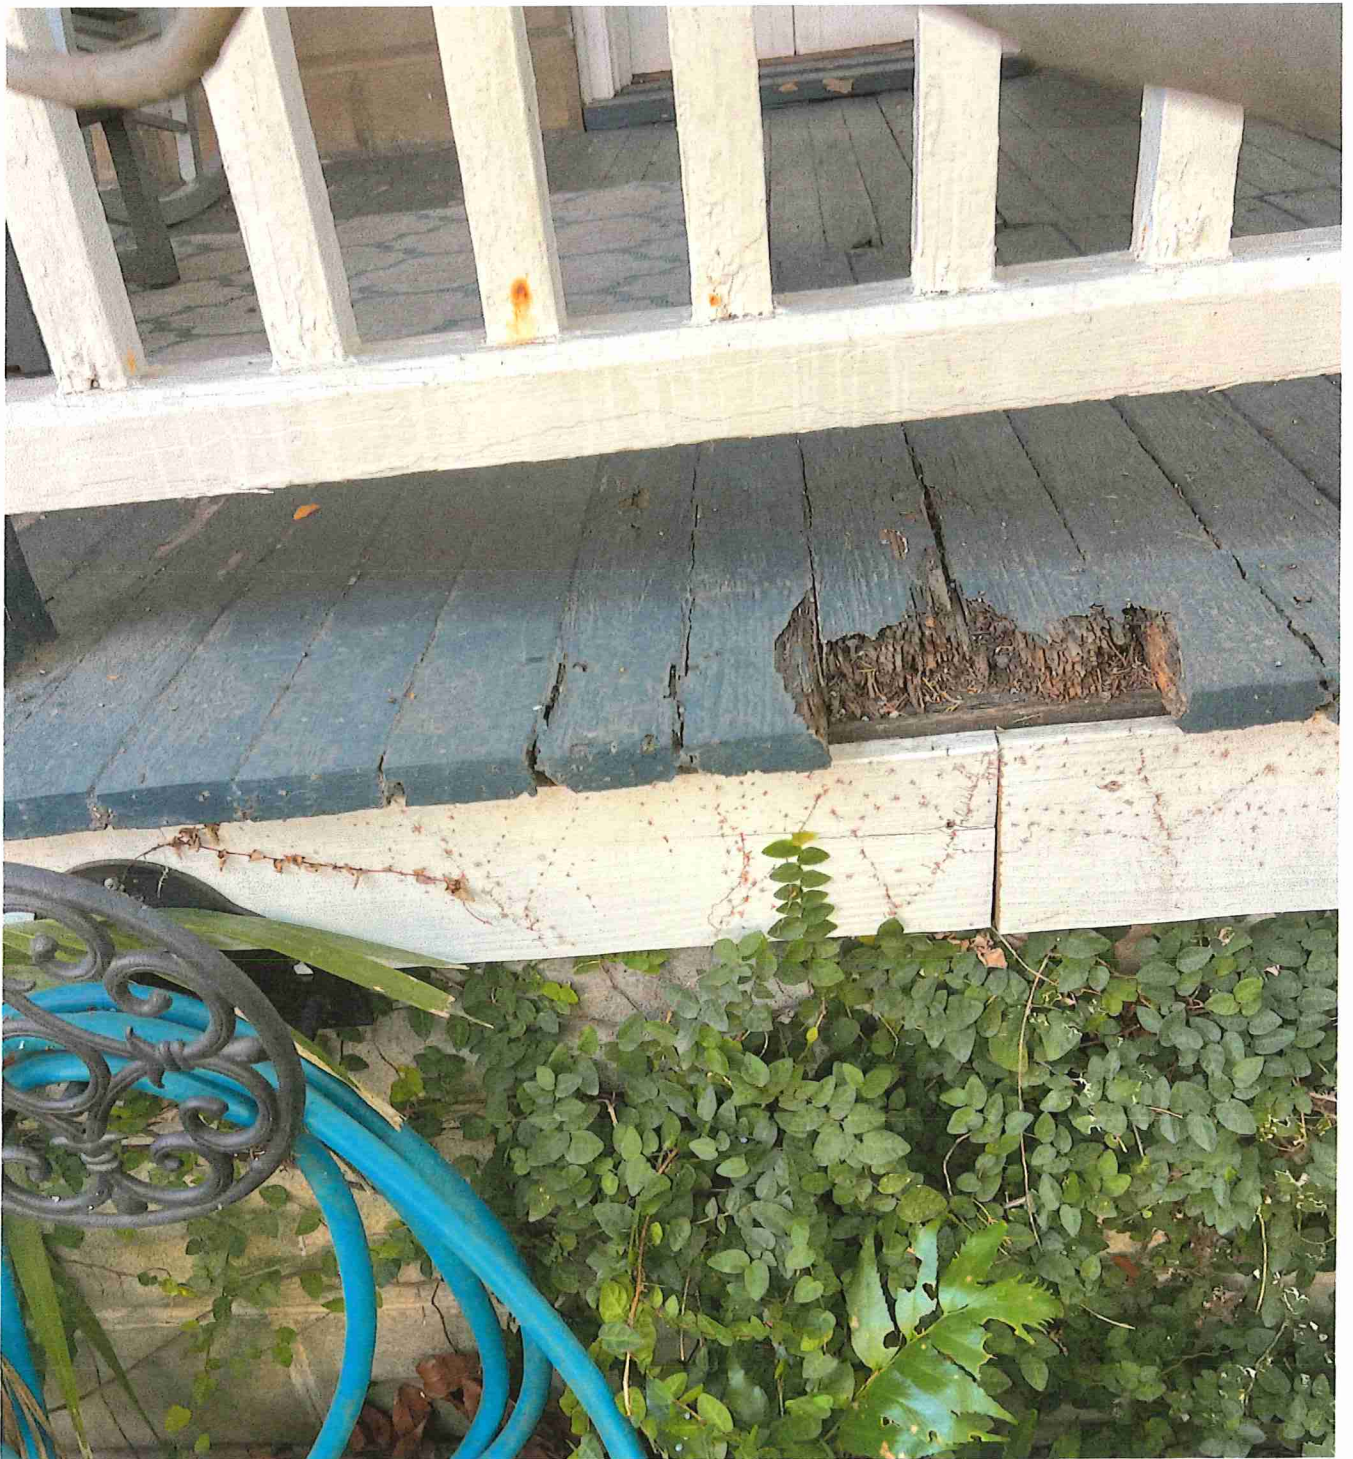



MENU

[Home](#) / [Products](#) / [Kiln Dried After Treatment](#) / [KDAT Tongue and Groove Porch Flooring](#)

KDAT TONGUE AND GROOVE PORCH FLOORING

Easy on the eyes. And the feet.

The porch is hallowed ground so use YellaWood® brand tongue and groove porch flooring. Kiln dried after treatment to minimize shrinkage after installation, you can't go wrong with YellaWood® brand porch flooring. KDAT porch flooring should be primed on all six sides (including field cuts) prior to installation.

[Find a KDAT Dealer Near You](#)

[KDAT flooring installation instructions](#)

Find inspiration, building tips and ideas for your next project.

[DOWNLOAD THE BOOK](#)

[FIND A DEALER NEAR YOU](#)

BENEFITS

- KDAT products must be painted, stained or sealed immediately after installation
- Kiln dried after treatment (KDAT) to minimize shrinking after treatment
- Proven protection against rot, fungal decay and termite attack
- Lifetime limited warranty
- Environmentally preferable treatment process

Prior to installation, keep elevated, covered and completely dry.

AVAILABLE IN


- Dimensions: 5/4x4", 1x4", 1x6"
- Lengths: 8', 10', 12', 14', 16'
- Grades: #1, #2, C&BTR, D&BTR, Center Match

Product availability varies by region.

RESOURCES



Sealing, Painting & Staining



Fastener Information



Care & Maintenance



CONTENTS

Boards, Finish.	1-2
Siding.	3-4
Ceiling & Paneling.	5-6
Flooring.	7-8
Porch Flooring.	9
Installation, Finishing.	10
Additional Information.	Back Cover

The samples pictured in this publication include examples of allowable characteristics within each grade, as described in the *Standard Grading Rules for Southern Pine Lumber* published by the Southern Pine Inspection Bureau. A complete lumber grade description should be included with any buyer's order, and is considered an agreement between buyer and seller of specific characteristics allowed with each grade purchased.

Southern Pine

Southern Pine grows in a wide geographic belt, stretching from East Texas through Virginia. Southern Pine is a term which represents four principle tree species: longleaf, shortleaf, loblolly, and slash. Lumber from all four species is classified as Southern Pine and graded in accordance with the grading rules of the Southern Pine Inspection Bureau (SPIB).

BOARDS

No. 1 Grade features superior appearance characteristics: generally few but sound, tight knots making it suitable for a high-quality finish or for industrial uses where a high quality is desired.

No. 2 Grade is a good-quality material suitable for patterns and general-purpose uses.



Table 1: Boards & Patterns Quick Reference Guide

	Grades						Moisture Content	Nominal Thickness	Nominal Width
	B&B*	C*	C&Btr.	D	No.1*	No.2			
Boards SPIB Rule 260					•	•	15%, 19%	1" to 1-1/2"	2" to 12"
Finish SPIB Rule 200	•	•	•	•			12%, 15% or 19%	3/8" to 4"	2" to 16"
Drop Siding SPIB Rule 220	•	•	•	•	•	•	12%, 15% or 19%	5/8" to 1"	4" to 12"
Bevel Siding SPIB Rule 253	•	•	•	•	•	•	12%, 15% or 19%	1/2" to 1"	4" to 8"
Ceiling SPIB Rule 250	•	•	•	•	•	•	12%, 15% or 19%	3/8" to 3/4"	3" to 6"
Paneling SPIB Rule 240	•	•	•	•	•	•	12%, 15% or 19%	1"	3" to 12"
Flooring SPIB Rule 210	•	•	•	•	•	•	12%, 15% or 19%	3/8" to 1-1/2"	2" to 6"

*Produced in limited quantities.



No.2 1x4



No.2 1x6




No.2 1x8

PORCH FLOORING


Southern Pine, combined with the latest advances in wood preservation, is a superior choice for porch flooring. With its built-in resistance to decay and termites, pressure-treated Southern Pine porch flooring, properly installed, will provide decades of satisfying service.

Porch flooring is similar in sizes, grades, and patterns to interior flooring (refer to pages 7-8). Nominal thicknesses are typically 1" and 1-1/4" (3/4" and 1" actual) with a tongue-and-groove pattern, available in widths of 4" to 6" nominal (3-1/8" to 5-1/8" actual). The grade of C&Btr is most-often specified for porch flooring applications.

The specification of material that is kiln-dried-after-treatment (KDAT) is highly recommended. Redrying the treated material will return each piece to a workable moisture content, generally to 19% or less. The advantages of KDAT flooring material include enhanced dimensional stability, and reduced tendencies to warp, twist, and cup.

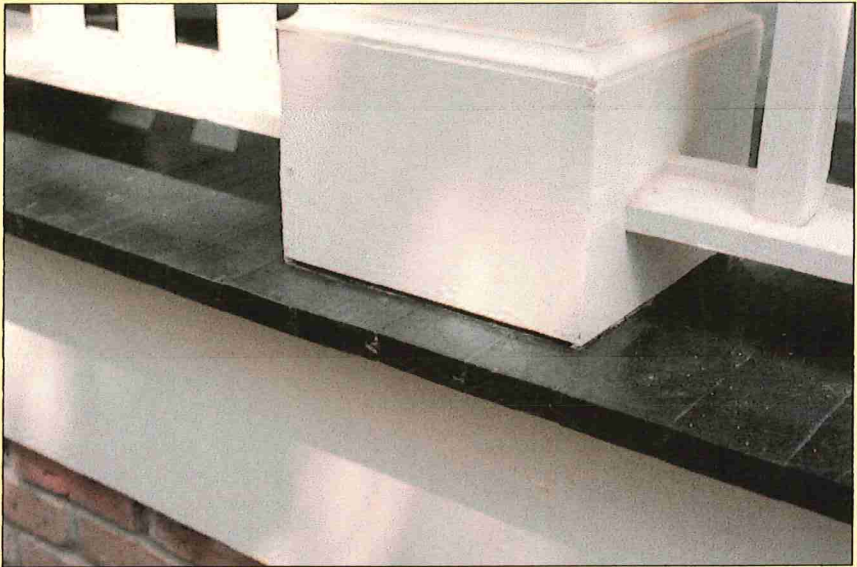

1x4 C&Btr T&G
Porch Flooring

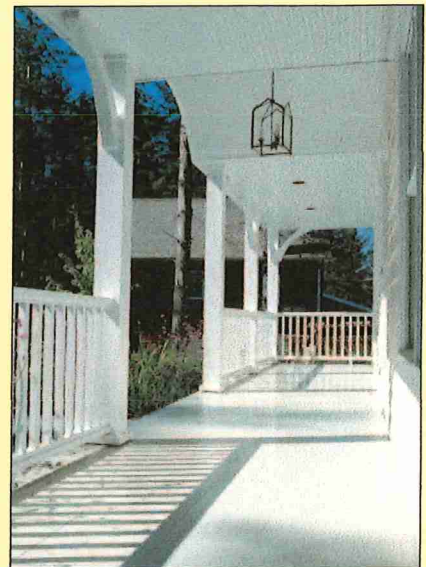

From: Russell Finland rfinland@hotmail.com 
Subject: Pix deck 409 e hall
Date: January 7, 2026 at 4:09 PM
To: Russell Finland rfinland@hotmail.com

3

RF



From: Russell Finland rfinland@hotmail.com 
Subject: KADEC wood decking
Date: January 7, 2026 at 3:51 PM
To: Russell Finland rfinland@hotmail.com

RF

4

